

# Self-Hauling Part 2: Filling out the C&D Diversion Report Form

## Construction & Demolition (C&D) Waste Diversion

Under State law and by local ordinance, all C&D Projects must recycle or reuse 65% of their waste debris. If you choose to self-haul your debris, you must provide documentation (weight receipts) showing that your debris were recycled and not buried in a landfill.


⇒ **STEP 1: Save ALL weight receipts from jobsite waste materials that were hauled away for reuse, recycling or disposal.**  
Keep track and estimate the weights of materials that were reused, recycled or disposed of at a facility that does not give weight receipts.

⇒ **STEP 2:** Using the weight receipts and material weight estimates, add up the total weight of jobsite waste that was reused, recycled, or disposed and enter the weights on the C&D Diversion Report Form. Include the estimated weights for materials without weight receipts.

*For C&D debris that are sent to a landfill or transfer station as Mixed C&D Debris—list 50% of the weight as recycled and 50% as disposed unless the facility guarantees a higher diversion.*

⇒ **STEP 3: Calculate the Project Waste Diversion Rate:**

- Add the total weight of reused and recycled jobsite waste to get the *Diversion*.
- Add the Diversion to the total weight of jobsite waste that was disposed to get the total *Generation*.
- Divide the Diversion by Generation to get the *Project Diversion Rate*



### Questions?

Contact Adam Morrill, City of Davis Environmental Program Specialist

(530) 757-5686 [AMorrill@CityofDavis.org](mailto:AMorrill@CityofDavis.org)

[DavisRecycling.org](http://DavisRecycling.org)

## Sample C&D Diversion Report Form

For the example below, ABC Construction hauled 2 tons of mixed construction debris (wood and drywall) and 2 tons of asphalt to the Yolo County Central Landfill. 0.1 tons of scrap metal were dropped off at Davis Waste Removal for recycling. Some doors were reused onsite (estimated at 200 lbs).

MATERIAL TYPE	Reuse	Recycle	Disposal	Hauler	Material Destination
Asphalt/Concrete		2 tons		ABC Construction	Yolo County Central Landfill
Brick/Tile					
Cardboard					
Carpet/Padding					
Dirt/Sod					
Doors/Gates	200 lbs				Reused onsite
Gypsum/Drywall		0.5 tons	0.5 tons	ABC Construction	Yolo County Central Landfill
Glass/Windows					
Insulation					
Metals/Scrap		0.1 tons		ABC Construction	Davis Waste Removal
Roofing					
Rock/Stone/Sand					
Stucco					
Wood/Lumber		0.5 tons	0.5 tons	ABC Construction	Yolo County Central Landfill
Yard Trimmings					
Other					
<b>TOTAL LBS</b>	200	—	—		
<b>TOTAL TONS</b>	0.1	3.1	1.0		

0.1	+	3.1	=	3.2
REUSE		RECYCLE		DIVERSION
3.2	+	1.0	=	4.2
DIVERSION		DISPOSAL		GENERATION
3.2	/	4.2	=	76%
DIVERSION		GENERATION		DIVERSION RATE

**Conversion:**  
2000 lbs = 1 ton



## CONSTRUCTION AND DEMOLITION DEBRIS DIVERSION REPORT

Applicant to submit completed REPORT  
BEFORE final inspection to:  
City of Davis, 23 Russell Blvd.,  
Davis, CA 95616

Applicant/Owner Name

Company Name

Phone #


E-Mail

Project Address

Project Type

MATERIAL TYPE	Reuse	Recycle	Disposal	Hauler	Material Destination
Asphalt/Concrete					
Brick/Tile					
Cardboard					
Carpet/Padding					
Dirt/Sod					
Doors/Gates					
Gypsum/Drywall					
Glass/Windows					
Insulation					
Metals/Scrap					
Roofing					
Rock/Stone/Sand					
Stucco					
Wood/Lumber					
Yard Trimmings					
Other					
<b>TOTAL LBS</b>					
<b>TOTAL TONS</b>					

**Conversion:**  
2000 lbs = 1 ton

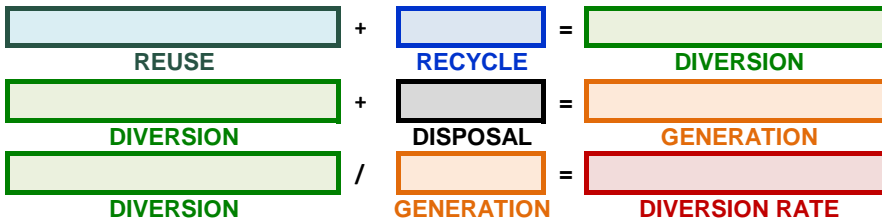

- All the construction and demolition debris from this project are accounted for in the chart above.
- I have put forth a good faith effort to ensure that a minimum of 65% of the waste debris from this project were recycled or reused.
- I have attached weight receipts and/or proof of reuse/recycling/disposal for all the materials indicated in the chart above.

\_\_\_\_\_ Signature

\_\_\_\_\_ Date

**FOR CITY USE ONLY**

Signature: \_\_\_\_\_ Date: \_\_\_\_\_ |